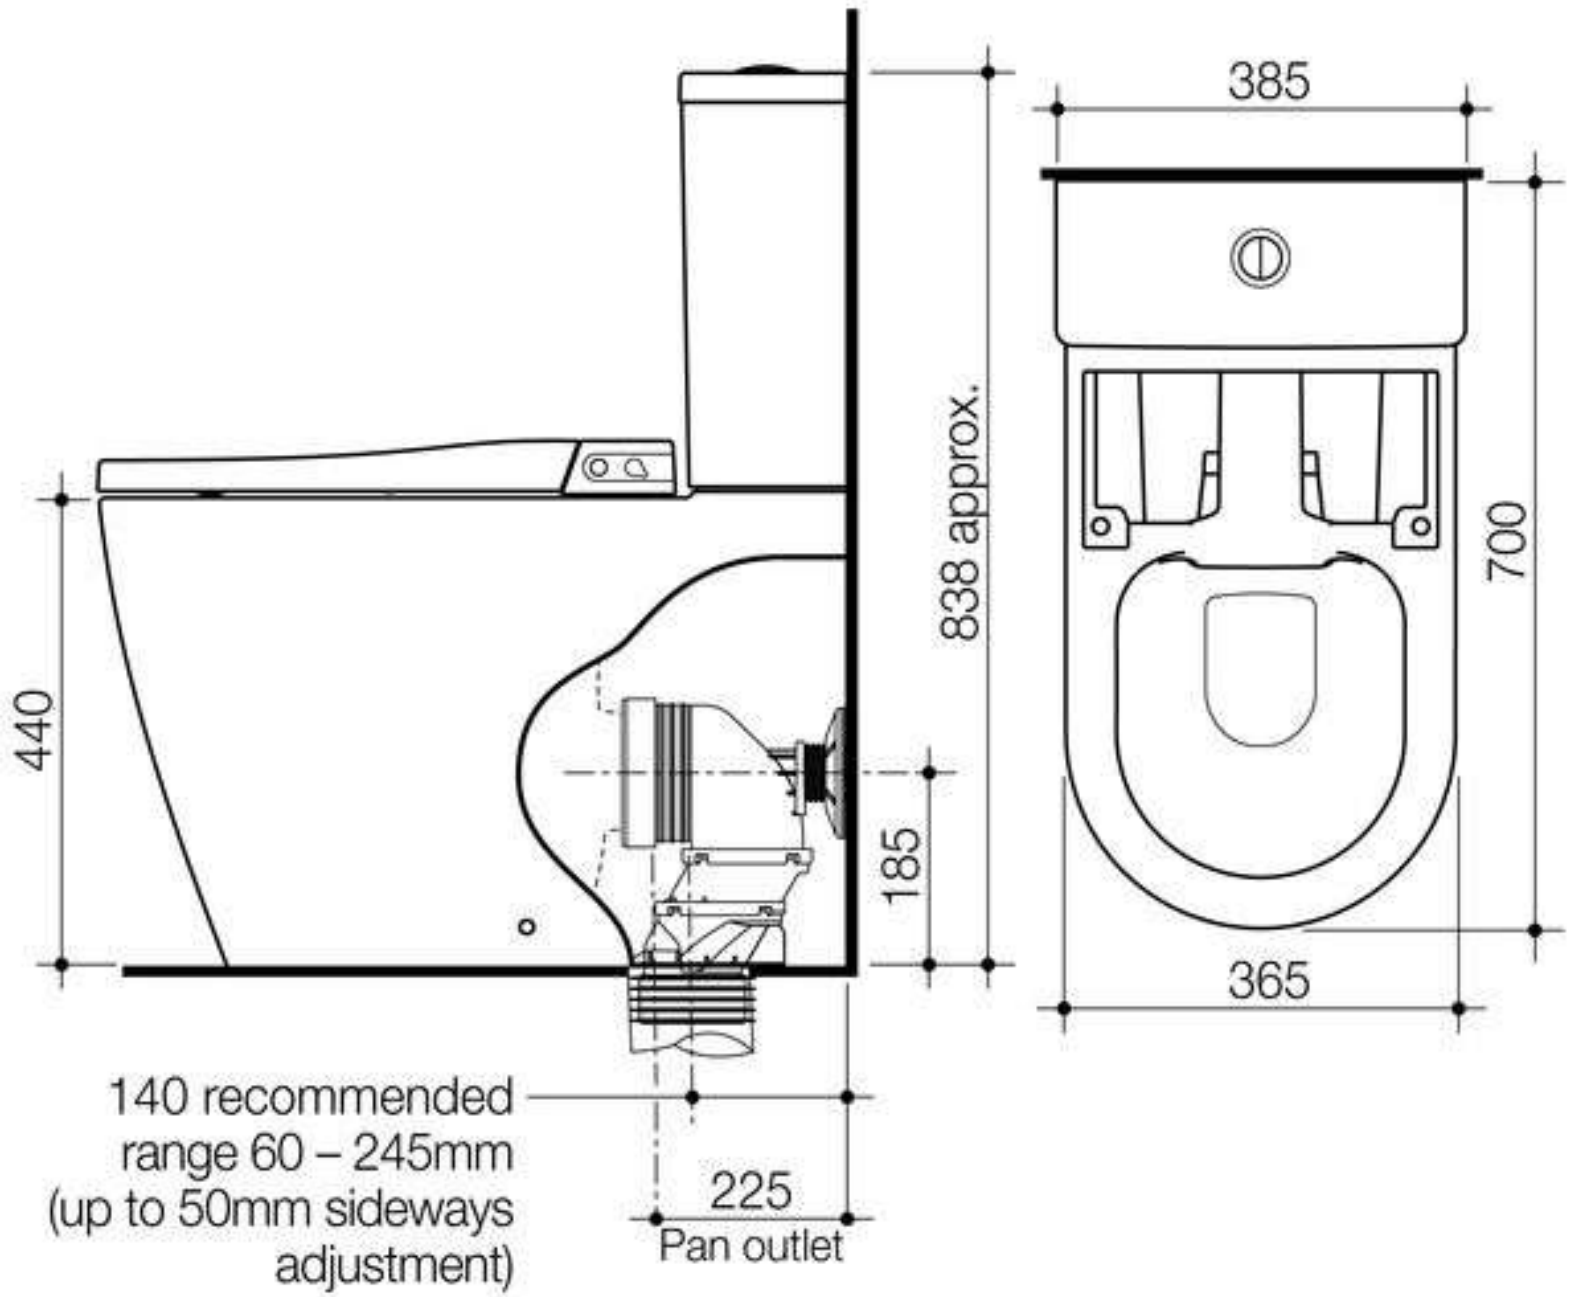
385
700
838 approx.
440
185
365
140 recommended
range 60 – 245mm
(up to 50mm sideways
adjustment)
225
Pan outlet